



resicon anchor studs steel



Description :

Chisel ended steel anchor studs in carbon steel and A4-316 grade stainless steel for maximum corrosion protection, both supplied with external hex drive complete with hex nut and plain washer for use with any of our injection systems and glass capsules in masonry and concrete.

1nr external drive adaptor included per box.


Material : Grade 5.8 carbon steel
 Finish : Bright zinc plated and/or yellow passivated
 Tensile strength (nom) : 500N/mm²

Material : Grade 316-A4 stainless steel
 Finish : Self colour
 Tensile strength (nom) : 800N/mm²

Also available in special grade HCR 1.4529 stainless steel to order only.

stud data

Stud diameter : mm (d)	Stud length : mm (l)	Effective anchoring depth : mm (b)	Washer outside diameter : mm (c)	Hex nut width across flats : mm (e)	Hex nut thickness : mm (d)
8	110	80	16	13	6.5
10	130	90	20	17	8
12	160	110	24	19	10
16	190	125	30	24	13
20	260	170	37	30	16
24	300	210	44	36	19
30	380	280	56	46	24

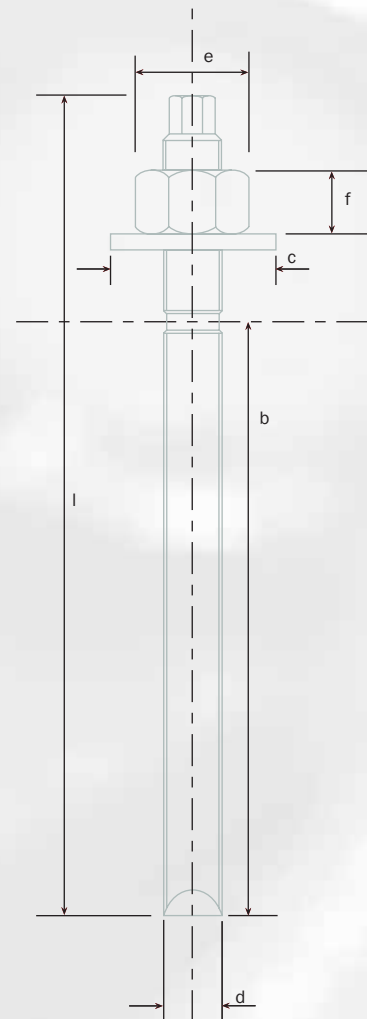

ordering information

product code	description	size : mm (d x l)	box qty
ANC471	chemical anchor stud Gr5.8 ZYP	8 x 110	10
ANC472	chemical anchor stud Gr5.8 ZYP	10 x 130	10
ANC473	chemical anchor stud Gr5.8 ZYP	12 x 160	10
ANC474	chemical anchor stud Gr5.8 ZYP	16 x 190	10
ANC475	chemical anchor stud Gr5.8 ZYP	20 x 260	6
ANC476	chemical anchor stud Gr5.8 ZYP	24 x 300	6
ANC477	chemical anchor stud Gr5.8 ZYP	30 x 360	6
ANC478	chemical anchor stud GrA4-316	8 x 110	10
ANC479	chemical anchor stud GrA4-316	10 x 130	10
ANC480	chemical anchor stud GrA4-316	12 x 160	10
ANC481	chemical anchor stud GrA4-316	16 x 190	10
ANC482	chemical anchor stud GrA4-316	20 x 260	6
ANC483	chemical anchor stud GrA4-316	24 x 300	6
ANC484	chemical anchor stud GrA4-316	30 x 360	6

additional information

Also available, a comprehensive range of square cut threaded bars from M4 to M64 in mild steel, Gr 8.8 high tensile steel, A2-304 and A4-316 stainless steel in various finishes for use with all our injection systems.

Non standard chisel ended anchor studs manufactured and plated to order.

NB. Square cut bars and studs require a screw on drive adaptor when used with resicon si capsules. Available separately in sizes up to M30.